



mdose

CATALOGUE 2025

MEDICAL MOBILITY & IT SOLUTIONS

SUMMARY

TROLLEYS

■ MEDICAL IT TROLLEYS

NOVELO IT trolley – Panel PC version	3
Trolley for laptop without battery	5
Trolleys for PC/monitor with or without battery	9

OPERATING ROOM & STERILIZATION EQUIPMENT

■ MEDICAL MOUNTING SOLUTIONS

Wall-mount columns	13
Pivoting or articulated arms	15

■ MEDICAL IT SOLUTIONS


Panel PCs	21
Medical monitors and tablets	22

■ MEDICAL-GRADE KEYBOARDS AND MICE

Wired keyboards and mice	23
Wireless keyboards and mice	24



NOVELO IT TROLLEY – PANEL PC VERSION

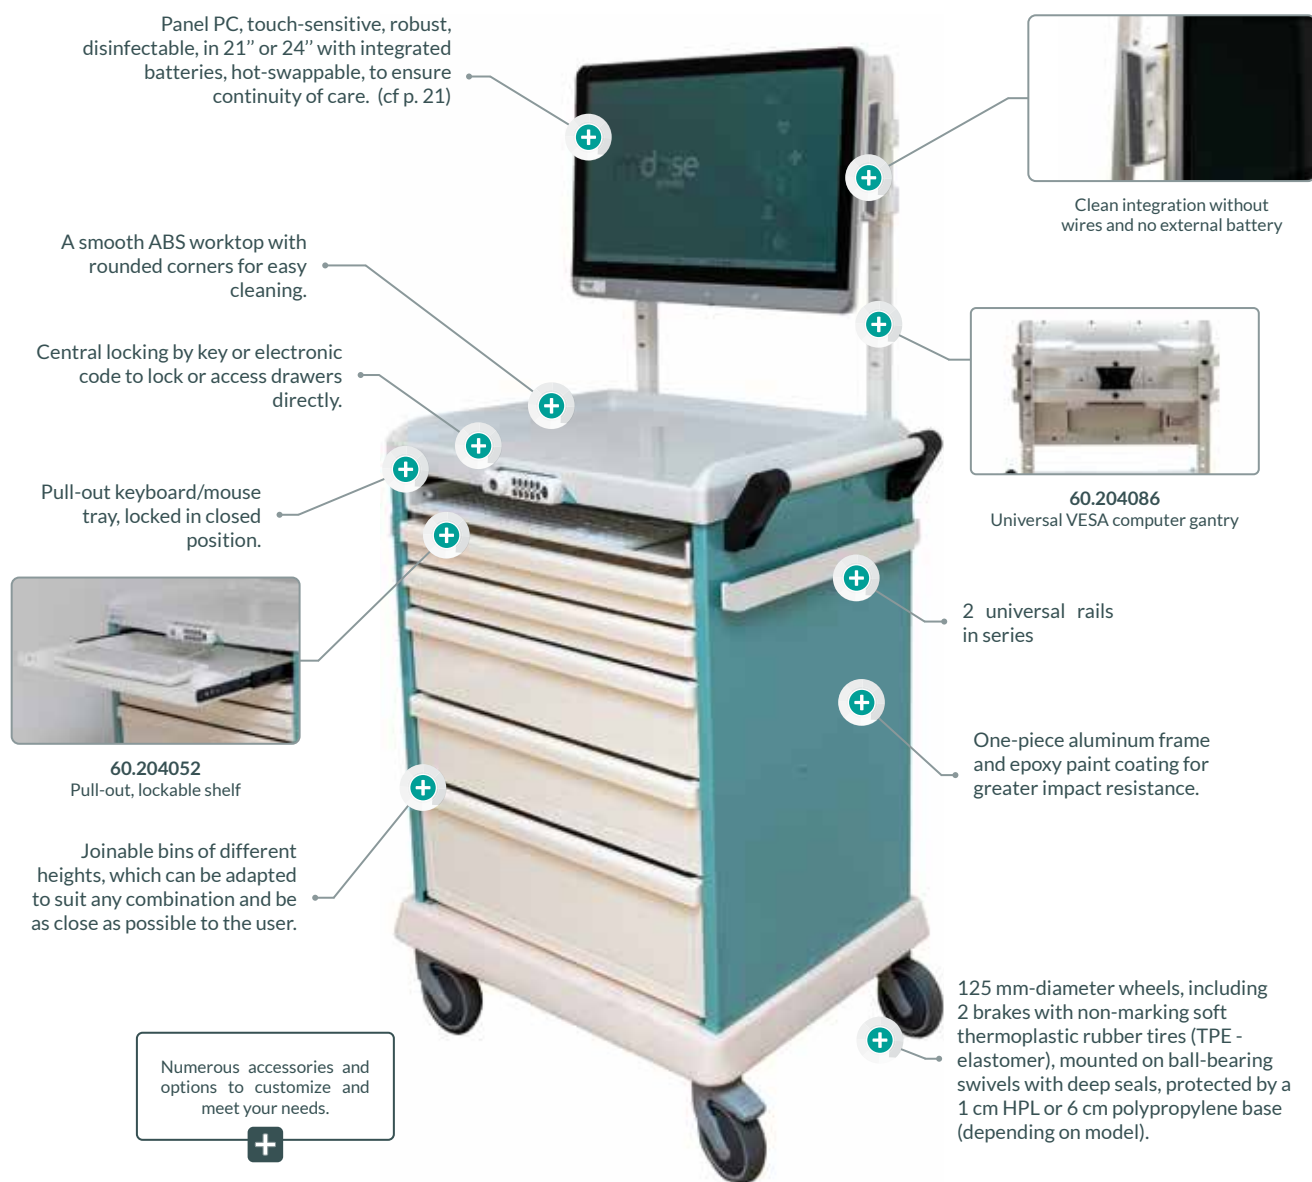

Trolley equipped with an Advantech Panel PC with external batteries (see page 21)

TECHNICAL SPECIFICATIONS

- Monobloc aluminum structure with epoxy-painted finish (available in 26 colors).
- 6 cm polypropylene base for Novelo 9 and 10 models.
- 1 cm HPL base for Novelo 12 and 14 models.
- ABS worktop with 3 cm raised edges.
- Internal ABS runners, tool-free removable for easy cleaning.
- Ø125 mm swivel castors with thread guards and soft, non-marking thermoplastic rubber (TPR) treads; ball bearing and deep-seal housing. 2 braking wheels.
- Standard equipment includes 2 universal rails.
- Centralized locking system by key or code (to be specified).
- Delivered without modular drawers. Optional accessories available for customized configuration.
- Made in France.
- 2-year warranty.

COMPONENTS



60.401010
Drawer H65 mm



60.401020
Drawer H135 mm



60.401030
Drawer H205 mm



60.402025
1/6 kit for 65 mm drawer



60.402015
1/4 kit for 65 mm drawer



60.402045
1/6 kit for 135 mm drawer



60.402035
1/4 kit for 135 mm drawer

ACCESSORIES



60.204075



60.204079



60.204090 - right
60.204091 - left



60.204050 - right
60.204051 - left



60.204073 - bottom left
60.204074 - bottom right



54537



60.204020



60.204035
15 x 15 x 28 cm



60.204024
10 x 10 x 8 / 12 cm




60.204023
14,5 x 8,5 x 16 cm



60.204015
36 x 13 x 9 cm



60.204019
40 x 21 x 21 cm



60.204017
43 x 26 x 12 cm

TROLLEY FOR LAPTOP WITHOUT BATTERY

JUNO series



TECHNICAL SPECIFICATIONS

- Aluminum frame with powder-coated finish. Smooth melamine worktop with rounded edges, dimensions: 530 x 580 mm.
- Integrated handle for easy mobility.
- Adjustable worktop height from 825 to 1220 mm.
- Wide base for enhanced stability and easy maneuverability.
- Four twin 70 mm castors, including two front locking wheels.
- Weight: 12.5 kg.
- Wide range of compatible accessories available.
- Delivered unassembled – easy to assemble.
- Warranty: 5 years.

2 basic configurations



JUNO BS with 1 rear security box
70.JUNO.01.1100.EU



JUNO PCB - Laptop on arm with secure back box
70.JUNO.01.3200.EU

Configuration with drawers



JUNO TS
1 drawer 422 x 66 x H76 mm with electronic lock - front opening
(compatible with all accessories except additional front basket and shelf)



JUNO TM

Single ABS drawer 405 x 290 x H76 mm - left side opening - work surface adjustable between 700 and 990 mm
(compatible with all accessories except additional front basket and double shelf)



JUNO TL

Single ABS drawer, height 405 x 290 x H150 mm - left side opening - work surface adjustable between 700 and 990 mm
(compatible with all accessories except additional front basket and double shelf)



JUNO 5TS

4 drawers H76 mm and 1 drawer H150 mm in ABS - electronically secured - front opening - worktop adjustable from 876 to 1274 mm.
(compatible with all accessories except additional front basket and shelf).

ACCESSORIES



Single shelf, left or right
70.PH.WS.300.WO



Front basket on column under worktop
70.PH.WB.101.WO



Rear basket on column under worktop
70.PH.WB.102.WO



Front wire basket
70.PH.WB.103.WO



Support for barcode reader on right and left sides
70.PH.SH.401.WO



Right-side hydroalcoholic gel holder
70.PH.GH.601.WO

TROLLEYS FOR PC/MONITOR WITH OR WITHOUT BATTERY

MDLS trolley without integrated battery, with or without keyboard support



MDLS SC
Trolley for panel PC with fixed arm and removable keyboard support

- Smooth melamine worktop offering high durability, with an integrated handle for easy mobility.
- Large working surface (dimensions: 619 x 613 mm) with two handles for enhanced maneuverability.
- Easily adjustable working height via a gas-lift cylinder, allowing the worktop to be set between 899 and 1345 mm.
- Wide base (555 x 674 mm) designed to prevent wheel collision and ensure optimal stability.
- Available options :
 - With or without sliding keyboard tray
 - With or without CPU holder
- Warranty: 5 years.



MDLS
Trolley for panel PC fixed arm



Trolley for panel PC with fixed arm, removable keyboard support and CPU case

TECHNICAL SPECIFICATIONS

- Aluminum frame with powder-coated finish. Smooth melamine worktop with rounded edges (dimensions: 619 x 613 mm).
- Height-adjustable worktop from 899 to 1345 mm.
- 4 twin castors, 70 mm in diameter, including 2 front wheels with brakes.
- Weight without accessories: 12.5 kg.
- Warranty: 5 years.



MDLS SC1T
MDLS 1 keyboard tray and 1 drawer



MDLS SC2T
MDLS 1 keyboard tray and 2 drawers




MDLS SC3T
MDLS 1 keyboard tray and 3 drawers



MDLS SC3T2
MDLS 1 keyboard tray and 3 drawers

NOVA trolley with integrated 256 or 512 Wh battery

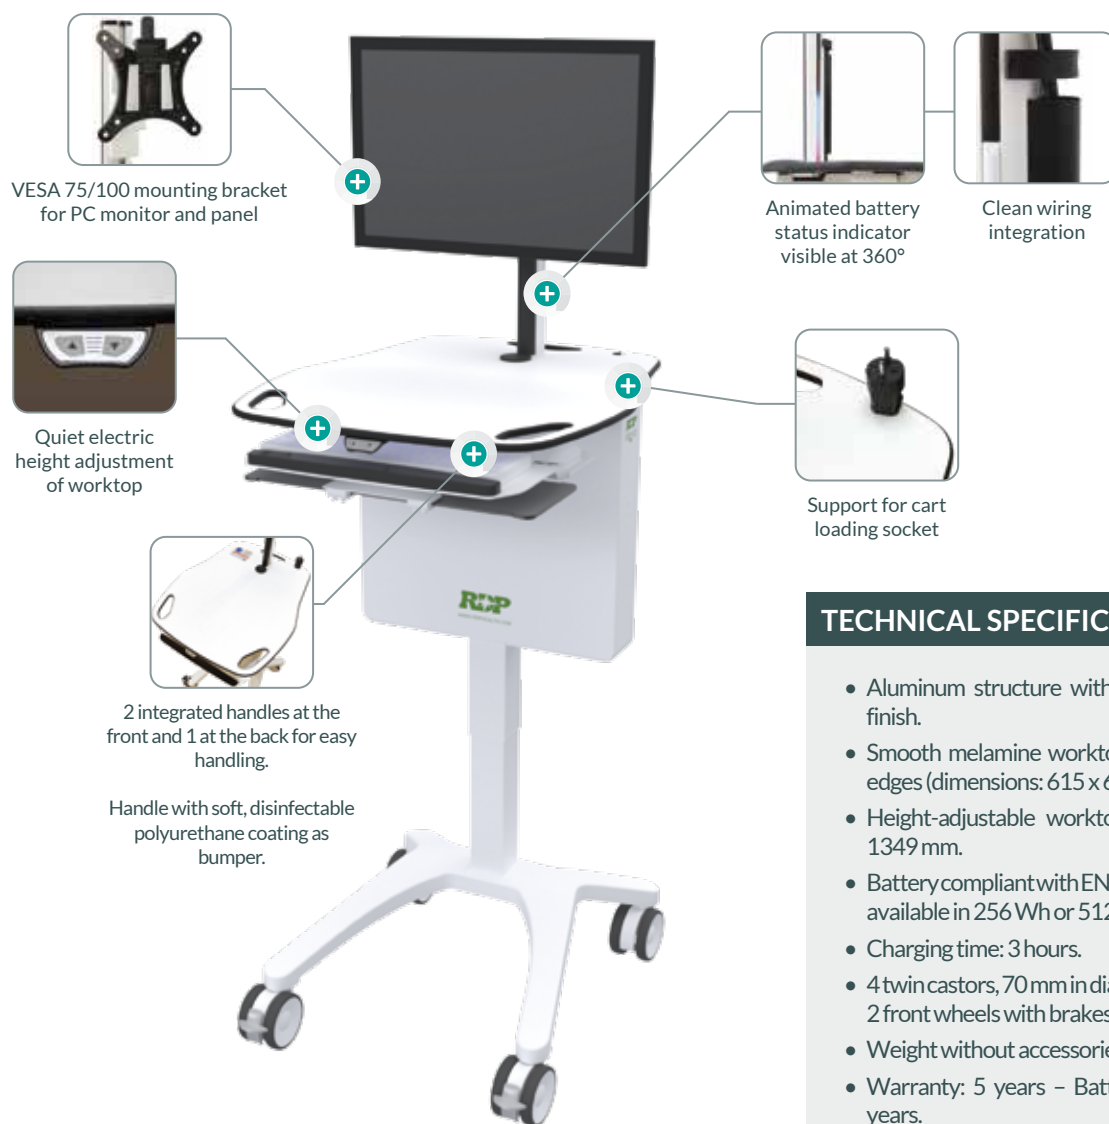

NOVA 256 SC / NOVA 512 SC

TECHNICAL SPECIFICATIONS

- Aluminum structure with powder-coated finish.
- Smooth melamine worktop with rounded edges (dimensions: 615 x 694 mm).
- Height-adjustable worktop from 903 to 1349 mm.
- Battery compliant with EN 60601 standard, available in 256 Wh or 512 Wh versions.
- Charging time: 3 hours.
- 4 twin castors, 70 mm in diameter, including 2 front wheels with brakes.
- Weight without accessories: 57 kg.
- Warranty: 5 years – Battery warranty: 5 years.



NOVA 256/512
3 drawers



NOVA 256/512
4 A4 drawers



NOVA 256/512
4 A3 drawers

NANO trolley with integrated 256 or 512 Wh battery



NANO

TECHNICAL SPECIFICATIONS

- Aluminum structure with powder-coated finish. Smooth melamine worktop with rounded edges (dimensions: 530 x 590 mm).
- Height-adjustable worktop from 903 to 1349 mm.
- Battery compliant with EN 60601 standard, available in 256 Wh or 512 Wh versions.
- Charging time: 3 hours.
- 4 twin castors, 70 mm in diameter, including 2 front wheels with brakes.
- Weight without accessories: 57 kg.
- Warranty: 5 years – Battery warranty: 5 years.



NANO 256 / 512
1 single drawer



NANO 256 / 512
1 drawer



NANO 256 / 512
2 drawers



NANO 256 / 512
3 drawers



WALL-MOUNT COLUMNS



ECO wall column



TECHNICAL SPECIFICATIONS

- Wall-mounted support for panel PC / monitor
- Column includes:
 - › 800 mm aluminum rail
 - › VESA 75/100 mount with lateral and tilt adjustment
 - › Foldable keyboard tray and mouse platform
 - › Optional CPU holder (requires a second aluminum rail)
- Optional CPU holder (requires a second aluminum rail)
- Effortless height adjustment of the working surface
- Maximum keyboard width: 208 mm
- Mouse platform dimensions: 220 x 180 mm
- CPU holder width: 134 to 234 mm
- Quick and easy assembly and installation

IT-Lift wall column

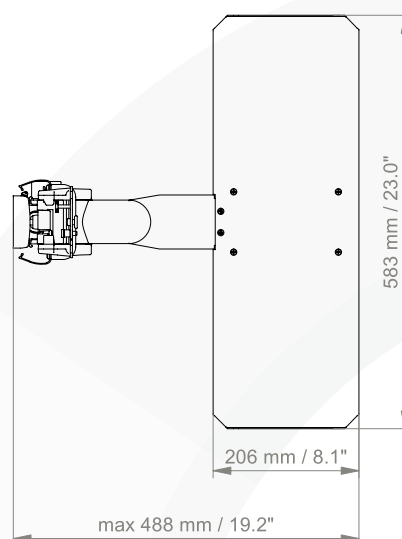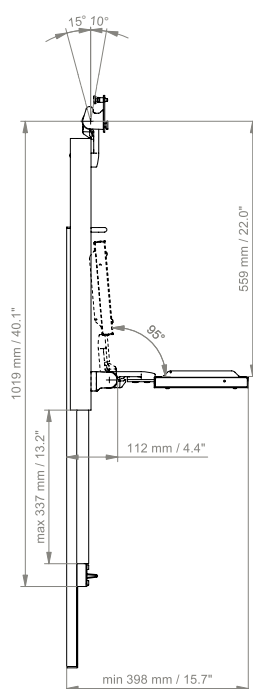

TECHNICAL SPECIFICATIONS

Compact wall-mounted column :

- Aluminum construction with RAL 9016 powder coating.
- Smooth surface for easy disinfection.
- Integrated cable management within the column.
- VESA 75/100 quick release mount.
- Adjustable work surface up to 328 mm.
- Maintenance-free with a 5-year warranty.
- Magnetic keyboard/mouse tray: Dimensions: 580 x 200 mm.
- Retractable keyboard tray for space-saving (100 mm from the wall when folded).
- When extended, the keyboard tray is 490 mm from the wall.
- Easy and simple assembly.
- Maintenance-free with a 5-year warranty.

PIVOTING OR ARTICULATED ARMS



Easy to clean



EN 60601 certification



Integrated cable



Space-saving

TECHNICAL SPECIFICATIONS

Available :

- Single or double pivot arms with $\pm 90^\circ$ rotation.
- Single or double adjustable arms for height adjustment according to ergonomic requirements.
- Tilt-adjustable equipment support (up/down).
- Aluminum construction with RAL 9016 epoxy paint coating.
- Smooth surface for easy disinfection.
- Integrated cable management within the arm.
- Easy and simple assembly.
- Maintenance-free with a 5-year warranty.

Fixed VESA termination arm for PC screen/panel and folding keyboard support 580x200 mm (Z termination)



Single pivot arm
Length 240 or 300 mm
224M / 230 M




Single adjustable arm
Length 450 mm
431M



Double pivot arm
Length 2 x 300 mm
H33030m



Double adjustable arm
Pivot length 250 and adjustable length 450 mm
73130M

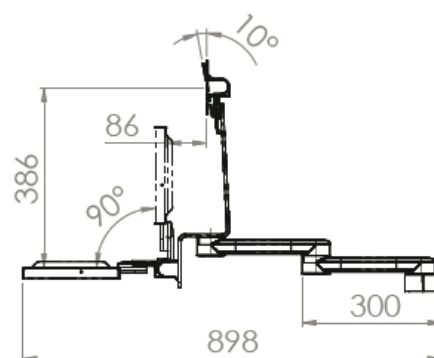

Fixed VESA termination arm for PC screen/panel and fixed keyboard support 580x200 mm (W termination)



Single pivot arm
Length 240 or 300 mm
224F / 230F




Single adjustable arm
Length 450 mm
431F



Double pivot arm
Length 2 x 300 mm
H33030F



Double adjustable arm
Pivot length 250 and adjustable length 450 mm
73130F

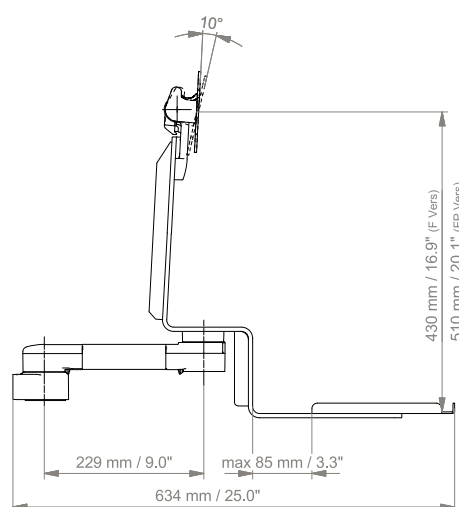

VESA termination arm for PC panel displays



Single pivot arm
Length 240 or 300 mm
224G - 230G



Single adjustable arm
Length 450 mm
431G



Short arm
910G - 910GS



Double pivot arm
Length 2 x 300 mm
33030G - Light applications
H33030G - Heavy-duty applications



Double adjustable arm
Pivot length 250 and adjustable 450 mm
73130G

VESA QUICK RELEASE termination arm for PC panel displays



Single pivot arm
224Q - 230Q



Single adjustable arm
431Q



Short arm
910Q



Double pivot arm
33030Q - Light applications
H33030Q - Heavy-duty applications



Double adjustable arm
73130Q


Fixed VESA termination arm for PC monitor / panel and inclined keyboard support 580x200 mm (L termination)



Single adjustable arm
Length 240 mm
431L



Double adjustable arm
Pivot length 250 and adjustable length 450 mm
73130L

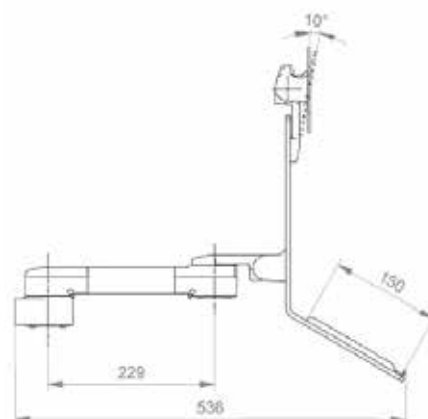

Termination arm for keyboard support 580x200 mm and mouse



Single pivot arm
Length 240 or 300 mm
224E - 230E



Single adjustable arm
Length 240 mm
431E



Short arm and fold-down keyboard



Short arm + fold-down keyboard
and right/left mouse holder



Double pivot arm
Length 2 x 300 mm
33030E



Double adjustable arm
Pivot length 250 mm and adjustable length 450 mm
73130E



Fold-out keyboard short arm

Monitor termination arm



Single pivot arm
Length 240 or 300 mm



Double pivot arm
Length 2 x 300 mm



Single adjustable arm
Length 240 mm




Double adjustable arm
Pivot length 250 and adjustable length 450 mm

Monitor termination arm PHILIPS




Single pivot arm
Length 240 or 300 mm

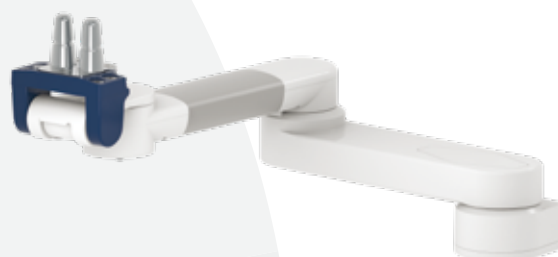

Double pivot arm
Length 2 x 300 mm



Single adjustable arm
Length 240 mm

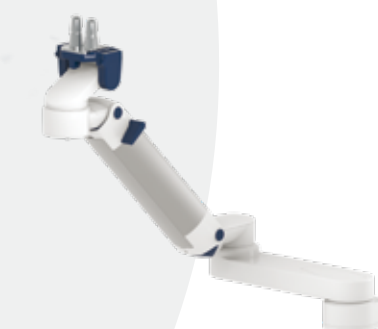

Double adjustable arm
Pivot length 250 and adjustable length 450 mm

Wall adapter



Fixation sur rail DIN horizontal
(DIN 10x25, 8x35, 10x30, 10x50 mm)



Vertical rail mounting
DIN 10 x 25 mm
9



Universal vertical rail mounting
4S



CIM rail mounting
(Please order vertical slide rail)
4V



Pipe mounting
25 / 30 / 35 / 38 mm
1 / 1B / 1F / 1C



Universal mounting
on 23-40 mm tube
1V

Respirator adapter



Attachment to anesthesia
machines (all suppliers)
With existing side rail H80 mm



Lateral adapter L178 mm
Dräger Apollo/Julian/Primus
To be ordered separately



Lateral adaptation L178 mm
Carestation 620/650/ GE Avance/
Avance CS2/ GE Aespire/Aespire
View
To be ordered separately



PANEL PCS

PANEL POC 6 internal power supply or external power supply



POC 621 – 21,5" / 624 -23,8"
internal or external power supply
11th generation



POC 621/624
with 2 external battery modules
for mobile solutions



Charging station



POC 615
11th generation

TECHNICAL SPECIFICATIONS

- Range available with either integrated power supply or external battery.
- Power supply integrated into the panel PC.
- Fanless design.
- Dust and splash resistance: IP65 front panel / IP54 rear panel.
- Capacitive touchscreen operable with gloves.
- Image zoom and rotation features.
- Flat, seamless surface for total and quick disinfection.
- Compliant with EN 60601-1-2 medical standard.
- Comprehensive and protected connectivity.
- Full HD resolution: 1920 x 1080.
- Available with Intel Core i5 or i7 processor.
- NVMe SSD drive.
- Warranty: 3 years, extendable to 4 or 5 years.

PANEL POC 4 external power supply



POC 421 - 21.5" / 424 - 23.8" without battery
14th generation



POC 421 - 21.5" / 424 - 23.8" with battery
14th generation



Hot-swappable batteries - Power ratings
2 x 140W (9 to 11H runtime)
2 x 210W (14 to 16H runtime)
2 x 280W (18 to 22H runtime)



Charging station

TECHNICAL SPECIFICATIONS

- Fanless design.
- Dust and splash resistance: IP65 front panel, XP1 rear panel
- Optional IP54 rear panel if no battery
- Optional IP43 rear panel with external batteries
- Capacitive touchscreen operable with gloves.
- 14th generation Intel Core U5 or U7 processor.
- Full HD resolution: 1920 x 1080.
- NVMe SSD storage.
- Compliant with EN60601-1-2 medical standard.
- 1 RS-232 port as standard, second port available as an option.
- No expansion slot.
- Warranty: 3 years, extendable to 4 or 5 years.

MEDICAL MONITORS AND TABLETS

The monitors



PAX-121 – 21,5"



PAX-124 – 23,8"



PAX 327 – 27"
PAX 332 – 32"

TECHNICAL SPECIFICATIONS

- Dust and splash resistant: IP54 protection on both front and rear panels.
- Touchscreen operable with gloves (optional).
- Image zoom and rotation capabilities.
- Flat, seamless surface for total and efficient disinfection.
- Compliant with medical standard EN60601-1-2.
- Extensive connectivity and front-facing control buttons.
- Available resolutions:
 - Full HD (1920 x 1080) – models PAX 121 and PAX 124
 - 4K UHD (3840 x 2160) – models PAX 327 and PAX 332
- Warranty: 2 years, extendable to 3 or 4 years.

The medical tablet



TECHNICAL SPECIFICATIONS

- Rugged and waterproof medical tablet – IP65-rated, resistant to alcohol-based hand sanitizers (ABHS).
- Cameras: 5 MP front, 13 MP rear Integrated 1D/2D barcode scanner.
- Wi-Fi: 802.11 a/b/g/n/ac/ax.
- Display: 10.1" touchscreen.
- Resolution: 1920 x 1200.
- Processor: Intel Celeron N200.
- Warranty: 2 years, extendable to 3 or 4 years.

WIRED KEYBOARDS AND MICE

Mdose antibacterial relief-free keyboard



73.001
Dim. : 400 x 130 x H22 mm

TECHNICAL SPECIFICATIONS

- Ultra-flat Medical Keyboard – AZERTY, USB Wired.
- Ultra-flat, seamless surface for quick and effective cleaning.
- Keyboard membrane combines Nano Silver antibacterial protection with hypoallergenic silicone barrier.
- Resistant to commonly used disinfectants.
- Replaceable membrane.
- Compact and slim dimensions: 400 x 130 x H22 mm.
- Key lifespan: 10 million keystrokes.
- Warranty: 1 year.

Mdose Medical Keyboard IP68 Rated



73.003
Dim. : 440 x 138 x H12 mm

TECHNICAL SPECIFICATIONS

- Medical Silicone Keyboard – IP68, AZERTY, USB/PS2.
- Full protection against dust and liquid ingress – IP68 rated (submersible).
- AZERTY wired keyboard, 106 keys.
- Slight key relief for improved typing accuracy.
- Key lock function for easy cleaning.
- Excellent tactile feedback.
- 100% silicone membrane, latex-free.
- Dimensions: 440 x 138 x H12 mm.
- Warranty: 1 year.

Mdose IP68 mouse



73.004
Dim. : 115 x 65 x H40 mm

TECHNICAL SPECIFICATIONS

- IP68 certified – fully submersible.
- Wired 5-button mouse – Interface: USB.
- Ergonomic design for comfortable use.
- 100% silicone, latex-free.
- Resistant to commonly used disinfectant products.
- External dimensions: 115 x 65 x H40 mm.

MEDIGENIC IP65 keyboard and mouse



73.CLAV.MED.IP65
MEDIGENIC IP65 wired keyboard
Dim. : 462 x 170 x H34 mm

TECHNICAL SPECIFICATIONS

- Ultra-flat, relief-free design for fast, efficient cleaning.
- IP65 standard: resistant to water and hydro-alcoholic solutions.
- Hypoallergenic, latex-free silicone material.
- Removable, replaceable casing.
- Key lock mode for easy cleaning.
- Light blue color.
- AZERTY keyboard.
- Cable length: 2 meters.
- Key life: 1 million presses.
- Compatible with: Windows 7, XP, 2000 and MAC.
- 2-year warranty.



73.SOURIS.MED.IP65.S
Wired IP65 USB MEDIGENIC mouse
Dim. : 137 x 67 x H37 mm

TECHNICAL SPECIFICATIONS

- Flat, easy-to-clean design.
- Can be rinsed with water (IP65 standard).
- Hypoallergenic, latex-free silicone material.
- Ergonomically designed to minimize strain.
- Light blue color.
- 3 buttons.
- Cable length: 2 meters.
- Interface: USB.
- Compatible: Windows 7, XP, 2000 and MAC.
- Warranty: 2 years.

IP68 keyboard



73.GPK.421WH.FR
IP 68 wired keypad
Dim : 446 x 131 x H15 mm

TECHNICAL SPECIFICATIONS

- IP68 silicone keyboard with antibacterial surface treatment.
- Complete protection against dirt and liquids.
- Easy cleaning with hospital-grade antibacterial wipes and sprays.
- Key surfaces protrude 5 mm for more effective disinfection.
- Excellent tactile feel, suitable for use with gloves.
- Keyboard deactivation function for cleaning without unplugging.
- 108-key AZERTY keyboard.
- Silicone surface, ABS casing.
- Compatible with: Windows (all versions) and Mac OSX.
- 3-year warranty.

WIRELESS KEYBOARDS & MICE

IP68 wireless keyboard



73.GPK.421W.WH.FR
IP68 keyboard
Dim : 446 x 131 x H15 mm

TECHNICAL SPECIFICATIONS

- IP68 silicone keyboard with antibacterial surface treatment.
- Rigid, sturdy keyboard, waterproof and washable, ABS case.
- Total protection against dirt and liquids, can be submerged (IP68).
- Easy cleaning with hospital-grade antibacterial wipes and sprays.
- Key surfaces protrude 5 mm for more effective disinfection.
- Excellent tactile feel, suitable for use with gloves.
- Wireless recharging via USB base (no need for batteries).
- Keyboard deactivation function for cleaning without unplugging.
- 108-key AZERTY keyboard.
- Wireless interface: Bluetooth and RF 2.4 GHz via adapter.
- Compatible with: Windows (all versions) and Mac OSX.
- Warranty: 3 years.






www.mdose.fr

10 route de Brie-Comte-Robert - 94520 Périgny-sur-Yerres FRANCE

Fax : +33 (0)1 45 10 15 95 - E-mail : info@mdose.fr

Tel. : +33 (0)1 45 10 77 90 / 77 91



Find all solutions for secure and traceable
unit dose dispensing on our website:

www.mdose-pda.fr

